


Tires – Urethane Face



E&E urethane tires are used to protect and silence cam followers in applications where metal to metal contact is objectionable. The resilient tires cushion impact and reduce wear, extending follower life. They also prevent marring of finished surfaces. E&E urethane tires are available in a variety of sizes to press-fit over standard cam followers.

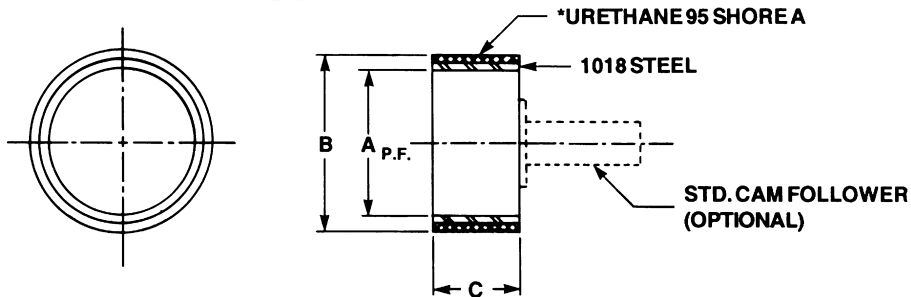

Click to download CAD File (3dwtg) 2dwtg visit eandesp.com

CAD FILE NAME	PART NUMBER	NOMINAL FOLLOWER SIZE A	A _{P.F.}	B	C
EUN-CF	EUN-CF-110	1/2	.500	.75	.38
	EUN-CF-111	9/16	.562	.81	.38
	EUN-CF-112	5/8	.625	.88	.44
	EUN-CF-113	11/16	.687	1.00	.44
	EUN-CF-114	3/4	.750	1.12	.50
	EUN-CF-115	7/8	.875	1.25	.50
	EUN-CF-116	1	1.000	1.38	.62
	EUN-CF-117	1-1/8	1.125	1.50	.62
	EUN-CF-118	1-1/4	1.250	1.62	.75
	EUN-CF-119	1-3/8	1.375	1.75	.75
	EUN-CF-120	1-1/2	1.500	1.88	.88
	EUN-CF-121	1-5/8	1.625	2.00	.88
	EUN-CF-122	1-3/4	1.750	2.12	1.00
	EUN-CF-123	1-7/8	1.875	2.25	1.00
	EUN-CF-124	2	2.00	2.50	1.25
	EUN-CF-125	2-1/4	2.250	2.75	1.25
	EUN-CF-126	2-1/2	2.500	3.00	1.50
	EUN-CF-127	2-3/4	2.750	3.25	1.50
EUN-CF-128	3	3.000	3.50	1.75	
EUN-CF-129	3-1/4	3.250	3.75	1.75	
EUN-CF-130	3-1/2	3.500	4.00	2.00	
EUN-CF-131	4	4.00	4.50	2.25	

Note:

1. Rolls not furnished with follower.
2. To order complete with follower, add "C" to Part Number. (Example EUN-CF-110-C)
- *3. Other sizes and materials are available through special order.

CAD Directory

MATL-Handling\Rollers